

led profile

Our PROFESSIONAL led profile series for surfaces/hanging applications is manufactured in high purity aluminium and lacquered in textured white, black and grey. Drivers can be housed inside.

This profile can offer different combinations: for use with our frosted white cover, cover with recessed tray and also with trellis or optic cover.

The internal tray allows us to screw the rigid led strip on one side and enables us to house the power supply on the other. At the same time this tray can be removed from the front which means easy maintenance. For safety measures, we recommend the fixing of a braided cable from the profile base to the dissipation tray. Both profile and cover are available in 3.4 metre lengths.

We offer a 2 year guarantee on the profiles and covers.



Aluminium profile

16.011	lacquered grey	3.40m
16.012	lacquered white	3.40m
16.013	lacquered black	3.40m



Aluminium tray

16.024	lacquered white	3.40m
--------	-----------------	-------



Cover

18.110	frosted	3.40m
18.120	microprism frosted	3.40m



Blind cover

18.112	white aluminium	3.40m
18.113	black aluminium	3.40m
18.118	grey aluminium	3.40m



Aluminium endcaps

19.246	grey
19.247	white
19.248	black



Profile joints

22.219	steel
--------	-------



Hanging kit


21.001	chrome	set of 2 units
21.002	white	set of 2 units
21.003	black	set of 2 units



Safety cable

22.039	steel	18cm
--------	-------	------

GALES

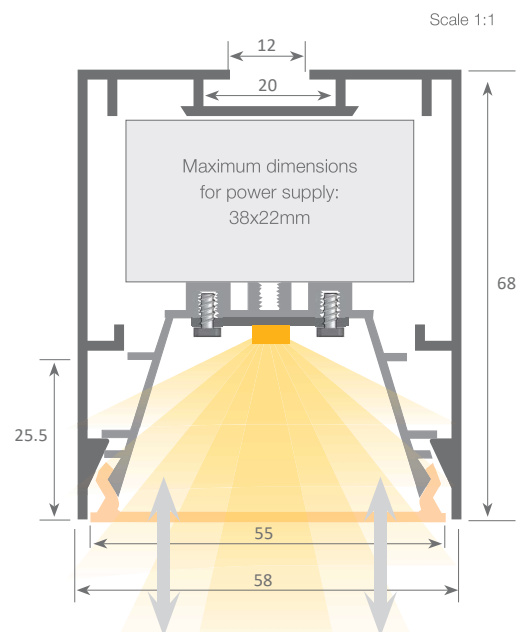

System with front removable tray which permits easy access to the led strip and power supply, therefore allowing very fast and simple maintenance of the electrical installation.



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 1.126 Kg. / Alloy: 6063 / Perimeter: 514 / Anodizing minimum: 15 microns
Purity aluminium: 95-98% / Treatment: T-5